




WYG-it 2 is a hardware interface device for Cast Software's WYSIWYG simulation software. It allows Lighting professionals to simulate and pre-cue their productions and send AutoFocus™ commands to their console. Each WYG-it 2 has 2 DMX inputs allowing the user to visualize up to 1024 channels of DMX. The WYG-it 2 also has 2 DMX throughs enabling the user to connect a console to WYSIWYG and the physical lighting equipment.

The WYG-it 2 connects to a user's computer via the USB port and does not need an external power supply. For systems using more than two universes of DMX, a user can simply connect multiple WYG-it 2s to the computer, either directly or through a USB hub. There is a rack-mount kit available that holds two WYG-it 2s in a standard 19" (47.5 cm) rack slot. Each WYG-it 2 has a security slot at each end that can be connected to a standard laptop computer lock for theft prevention.

Using the AutoFocus™ protocol, WYSIWYG can transmit colour, focus, and other attributes directly to a compatible lighting console. The WYG-it 2 has both a MIDI and a Serial port, allowing AutoFocus™ to connect directly to a number of different consoles. The AutoFocus™ settings are controlled through the WYG-it 2 interface in the computer's Control Panel.

WYG-it 2 (rear view)

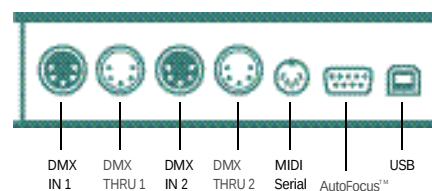

Minimum Requirements

It is recommended that you have a PC with the following minimum specification:

- Pentium or compatible processor 550MHz or better
- Win98, 2000, ME, XP
- 128MB RAM
- 30MB free disk space
- WYSIWYG Simulation Software – WYSIWYG 500, 1000, 2000, 5000 or Perform
- Free USB Port
- AutoFocus™ – compatible console for use of AutoFocus™ feature

Product information and specification subject to change

The name WYSIWYG is a registered trademark of Cast Lighting Limited.
The names Cast Software, WYSIWYG Perform, WYG-it 2 and AutoFocus are trademarks of Cast Lighting Limited. All other trademarks and logos, where used, are the property of their respective owners.